




PAOLONI GROUP

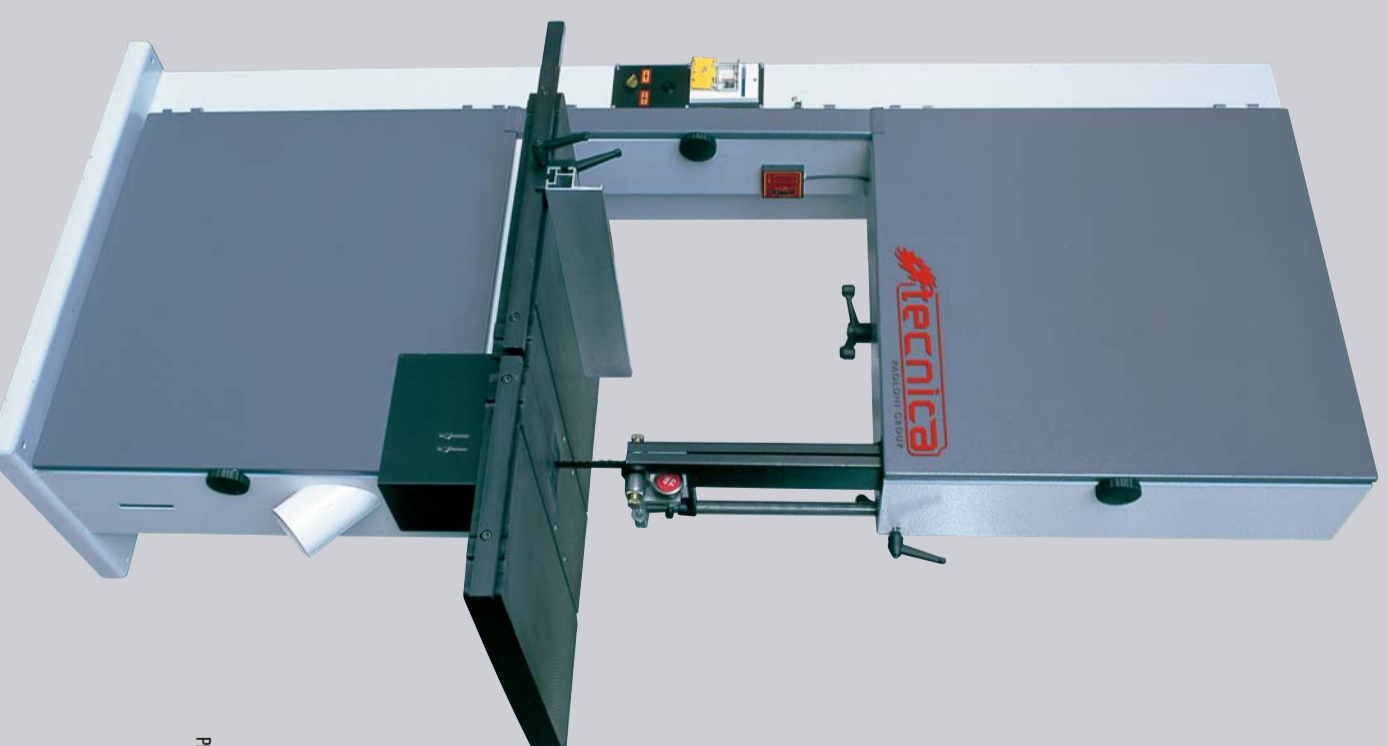

**HOLZSTAUB
RICHTWERT
ERDGESÄLTEN MACH
TRGS 102**

Foto della macchina conforme alle norme CE
Abgebildetes Modell in EG-Ausführung
Picture of the machine in CE version
Photo de la machine conforme aux normes CE
Foto de la máquina conforme normas CE

SN 700-800-900

DATI TECNICI			
Volanti in ghisa Ø mm	SN700	SN800	SN900
Larghezza volanti mm	700	800	900
Dimensioni del piano mm	40	40	50
Inclinazione piano	700x930	1130x800	1130x800
Bocca di aspirazione Ø mm	0°+45° / CE 0°+20	0°+45° / CE 0°+20	0°+45° / CE 0°+20
Altezza max di taglio mm	100	120	120
Larghezza max di taglio mm	430	500	560
Velocità del nastro m/s	670	785	885
Lunghezza nastro mm	18	25	25
Larghezza nastro mm	5070	5550/5470	6100/6020
Potenza motore HP/KW	10+40	10-45	10-55
Motore rettifico optional KW (HP)	4 (3)	5,5 (4)	7,5 (5,5)
Peso Kg	420	0,55 (0,75)	0,55 (0,75)

TECHNISCHE DATEN

Gührrollen Ø mm	SN700	SN800	SN900
Rollenbreite mm	700	800	900
Maschinentischgröße mm	40	40	50
Tischneigung	700x930	1130x800	1130x800
Absaugstützen Ø mm	0°+45° / CE 0°+20	0°+45° / CE 0°+20	0°+45° / CE 0°+20
Schnitthöhe max. mm	100	120	120
Schnittbreite max. mm	430	500	560
Bandgeschwindigkeit m/S	670	785	885
Sägebandbreite mm	18	25	25
Sägebandlänge mm	5070	5550/5470	6100/6020
Motorleistung PS/KW	10+40	10-45	10-55
Motor des Vorstübes Zubehör PS (KW)	4 (3)	5,5 (4)	7,5 (5,5)
Gewicht Kg	420	0,55 (0,75)	0,55 (0,75)

TECHNICAL DATA


Cast iron wheels Ø mm	SN700	SN800	SN900
Wheel width mm	700	800	900
Table size mm	40	40	50
Tilting table	700x930	1130x800	1130x800
Saw dust outlet Ø mm	0°+45° / CE 0°+20	0°+45° / CE 0°+20	0°+45° / CE 0°+20
Max. cutting height mm	100	120	120
Max. cutting width mm	430	500	560
Band speed m/s	670	785	885
Blade length mm	18	25	25
Blade width mm	5070	5550/5470	6100/6020
Motor size HP/KW	10+40	10-45	10-55
Feeder's motor optional HP (KW)	4 (3)	5,5 (4)	7,5 (5,5)
Weight Kg	420	0,55 (0,75)	0,55 (0,75)

DONNÉES TECHNIQUES

Volants en fonte Ø mm	SN700	SN800	SN900
Largeur du volant mm	700	800	900
Dimensions de la table mm	40	40	50
Inclinaison de la table	700x930	1130x800	1130x800
Goulotte d'aspiration Ø mm	0°+45° / CE 0°+20	0°+45° / CE 0°+20	0°+45° / CE 0°+20
Hauteur maxi de coupe mm	100	120	120
Largeur maxi de coupe mm	430	500	560
Vitesse du ruban m/s	670	785	885
Longueur de la lame mm	18	25	25
Largeur de la lame mm	5070	5550/5470	6100/6020
Puissance moteur CV/KW	10+40	10-45	10-55
Moteur de l'entraineur optional CV/KW	4 (3)	5,5 (4)	7,5 (5,5)
Poids Kg	420	0,55 (0,75)	0,55 (0,75)

DATOS TÉCNICOS

Polas de fundición Ø mm	SN700	SN800	SN900
Anchura polas mm	700	800	900
Dimensiones de la mesa mm	40	40	50
Inclinación de la mesa	700x930	1130x800	1130x800
Boca de aspiración Ø mm	0°+45° / CE 0°+20	0°+45° / CE 0°+20	0°+45° / CE 0°+20
Altura max del corte mm	100	120	120
Anchura max del corte mm	430	500	560
Velocidad de la cinta m/s	670	785	885
Longitud de la cinta mm	18	25	25
Anchura de la cinta mm	5070	5550/5470	6100/6020
Potencia motor HP/KW	10+40	10-45	10-55
Motor dispositivo de avance optional HP (KW)	4 (3)	5,5 (4)	7,5 (5,5)
Peso Kg	420	0,55 (0,75)	0,55 (0,75)

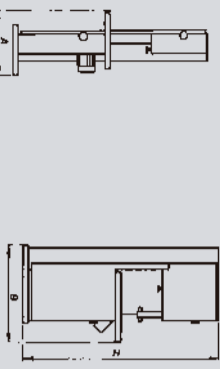


A	SN700	SN800	SN900
B	750	1590	1690
H	1260	880	920
	2230	2390	2580



Indice tensione lama (Standard per paesi CEE)
 Blattspannungsanzeige (Standard für EU Länder)
 Blade tension indicator (Standard for EEC countries)
 Indicateur tension lame (Standard pour pays CEE)
 Índice tensión hoja (Standard para países de la CEE)

-  **OPTIONAL**
-  **OPTIONALS**
-  **SONDERZUBEHÖR**
-  **SUR DEMANDE**
-  **OPCIONALES**

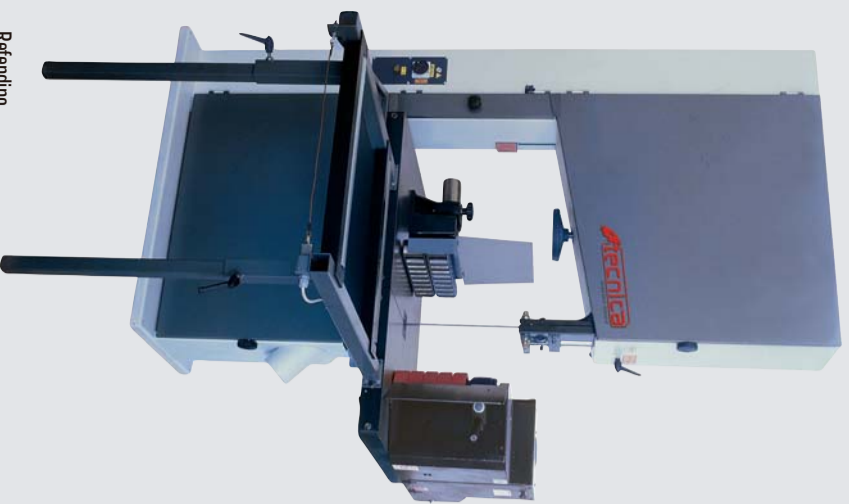


Referenzino
 Vorschussapparat
 Feeding Device
 Dispositif d'entrainement
 Dispositivo de avance

tecnica
 PAOLONI GROUP
SN 700-800-900

CE
 - VERSIONE
 - EQUIPMENT
 - AUSFÜHRUNG
 - EQUIPEMENT
 - EQUIPAMIENTO


-  **OPTIONAL**
-  **OPTIONALS**
-  **SONDERZUBEHÖR**
-  **SUR DEMANDE**
-  **OPCIONALES**

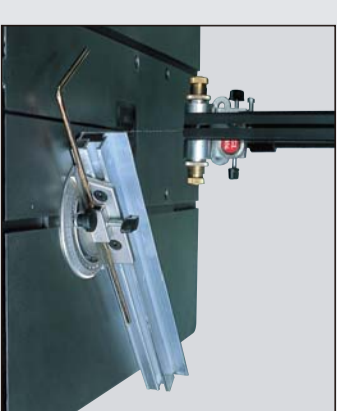

Squadretto per tagli angolari
 Gehrungslinial
 Mitre quadrant
 Equerre pour coupes angulés
 Escuadra para cortes angulares



Guidelama inferiore
 Untere Rollenführung - auf Anfrage
 (Serienausführung in Deutschland und Österreich)
 Bottom guide
 Guidelama inférieur
 Guíañoja inferior

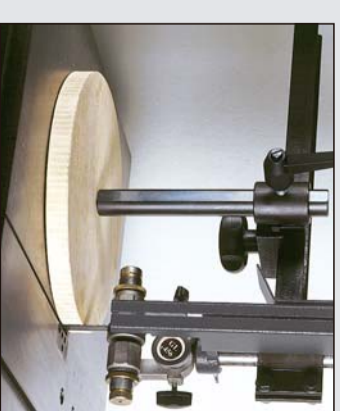

Compasso per tagli a raggio
 Kreisschneideinrichtung
 Compass for radius cut
 Compas pour coupes à rayon
 Compás para cortes circulares

SN 700

SN 800-900

